




国家强基工程示范企业
Demonstration Enterprise of National
Consolidation of Industrial Foundation Program



力克川液压
LKC HYDRAULIC

专业 专注 创新 极致
Professional Concentrated Innovative Extreme

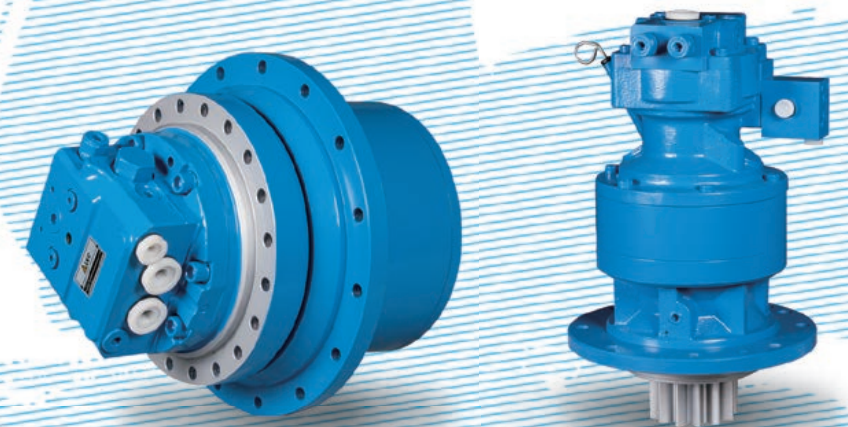

液压驱动装置专业制造商

服务热线 400 116 2006
www.likechuan.com

青岛力克川

地址: 中国青岛高新技术产业开发区思源路36号

电话: +86-532-55676157

国内邮箱: lkc2006@likechuan.com

海外邮箱: lkc@lkc2006.com

LKC Qingdao

ADD: No. 36, Siyuan Road, Qingdao High-tech Industrial Development Zone, China

TEL: +86-532-55676157

Domestic E-mail: lkc2006@likechuan.com

Overseas E-mail: lkc@lkc2006.com

本公司保留产品更改权, 如有变动, 恕不另行通知。

We reserve the right to change our products without prior notice.

2018年第1版印刷

青岛力克川液压机械有限公司
QINGDAO LKC HYDRAULIC MACHINERY CO., LTD.



微型系列回转马达 Micro Series Swing Motor

产品介绍 Product introduction

本产品为斜盘式直轴液压马达驱动的回转装置。马达内部装有补油阀、回转制动器、溢流阀等辅件，保证了回转装置运转平稳，安全可靠。特点：结构简单、体积小、噪音低。

Swing motor: This product is a swing device driven by a swash plate type straight axis hydraulic motor. There are built-in accessories like oil filling valve, rotary brake and relief valve to ensure stable and safe operation of the swing device. Features: simple structure, small size and low noise.




技术参数 Specifications

型号 Model	最大理论输出扭矩 (N.m) Max Output Torque	最高工作压力 (Mpa) Max Working Pressure	最高输出转速 (r/min) Max Output Speed	适用吨位 (T) Applicable Tonnage
LSMN-10-10	627	21.6	60	~2.5
LSMN-16-21	1000	21.6	90	~3.5
LSMN-24-21	1399	21.6	100	~5
LSMN-34-23	2434	21.6	60	~6
LSMK-27B-10A	830	20.6	100	~2.5
LSMK-27B-16A	1270	20.6	100	~3.5
LSMK-27B-23A	2040	20.6	100	~6
LSMK-44B-21A	3480	24	82	~8

安装参数 Parameters

型号 Model	LSMN-10-10	LSMN-16-21	LSMN-24-21	LSMN-34-23	LSMK-27B-10A	LSMK-27B-16A	LSMK-27B-23A	LSMK-44B-21A
A	Φ193	Φ242	Φ248	Φ280	Φ242	Φ242	Φ248	Φ310
B	Φ168	Φ210	Φ220	Φ250	Φ212	Φ212	Φ220	Φ275
C	Φ110	Φ150	Φ175	Φ190	Φ150	Φ150	Φ175	Φ220
D	264	283	323	368	284	323	364.5	503
E	67	96	94	105	76	83	97.5	104
F	178	168	208	243	123	155	190.5	344
G	162	208	215	240	210	210	210	240
H	4-Φ13	6-Φ17	10-Φ17	8-Φ17	6-Φ15	6-Φ15	8-Φ17	8-Φ18
J	103	101.5	84.5	96	85	85	85	122
K	59.5	66.5	61.5	65.5	75	75	125.5	102.5
L	2-25.5	2-25.5	2-25.5	2-31	2-29.5	2-29.5	2-29.5	2-26
M	98.5	83	83	93	98.5	83	83	93
N	G3/8	G3/8	G3/8	G1/2	G3/8	G3/8	G3/8	G1/2
O	2-G3/8	2-G3/8	2-G3/8	2-G1/2	2-G3/8	2-G3/8	2-G3/8	2-G1/2
P	G3/8	G3/8	G3/8	G3/8	G1/4	G1/4	G3/8	G3/8
Q	2-G1/4	2-G1/4	2-G1/4	2-G1/4	2-G1/4	2-G1/4	2-G1/4	2-G1/4

详细尺寸参数以我司技术图纸为准。
Detailed dimension parameters shall be subject to our technical drawings.

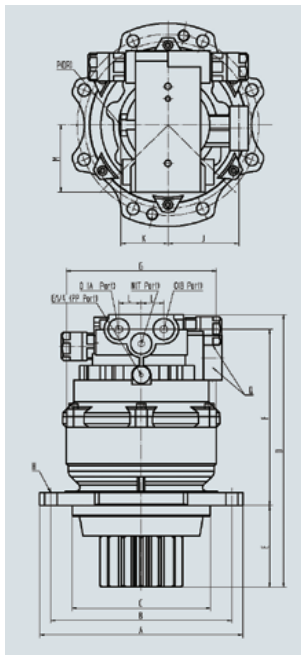

中小型系列回转马达 Small and Medium Series Swing Motor

产品介绍 Product introduction

本产品为斜盘式直轴液压马达驱动的回转装置。马达内部装有补油阀、回转制动器、溢流阀等辅件，保证了回转装置运转平稳，安全可靠。特点：结构简单、体积小、噪音低。

Swing motor: This product is a swing device driven by a swash plate type straight axis hydraulic motor. There are built-in accessories like oil filling valve, rotary brake and relief valve to ensure stable and safe operation of the swing device. Features: simple structure, small size and low noise.




技术参数 Specifications

型号 Model	最大理论输出扭矩 (N.m) Max Output Torque	最高工作压力 (Mpa) Max Working Pressure	最高输出转速 (r/min) Max Output Speed	适用吨位 (T) Applicable Tonnage
LSME-30-19	2320	25	102	6~8
LSME-43-19	3320	25	102	6~8
LSME-64-19	4800	25	105	9~12
LSME-80-19	6050	25	105	13~16
LSME-151-17	11022	26	113	20~23
LSMC-63-19	5760	29.4	115	~12
LSMC-130-20	13400	32.4	92	~20
LSMC-180-22	18640	32.4	84	~25
LSMC-180-25	23480	32.4	67	~30

安装参数 Parameters

型号 Model	LSME-30-19	LSME-43-19	LSME-64-19	LSME-80-19	LSME-151-17	LSMC-63-19	LSMC-130-20	LSMC-180-22	LSMC-180-25
A	200	200	200	200	310	200	310	345	380
B	275	275	290	290	360	290	360	400	484
C	311	311	323	323	410	323	410	450	528
D	98.5	98.5	114.5	114.5	144.5	113	162	179	182
E	502	502	594.5	594.5	767	487	567	649	676
F	160	160	167	167	185	124.5	118	131	131
G	7-Φ18 (Φ18)	7-Φ18 (Φ18)	9-Φ18 (Φ20)	9-Φ18 (Φ20)	12-Φ22	9-Φ18+ 1-Φ20	11-Φ22+ 1-Φ24	13-Φ22+ 1-Φ24	14-Φ25
H	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	2-Φ13	2-Φ20	2-Φ20	2-Φ20
J	G3/4"	G3/4"	G1/4"	G1/4"	G1/4"	G1/4"	G1/4"	G1/4"	G1/4"
K	G3/4"	G3/4"	G3/4"	G3/4"	G1"	G3/4"	G3/4"	G1"	G1"
L	G1/4"	G1/4"	G1/4"	G1/4"	G1/4"	G1/4"	G1/4"	G1/4"	G1/4"

详细尺寸参数以我司技术图纸为准。
Detailed dimension parameters shall be subject to our technical drawings.

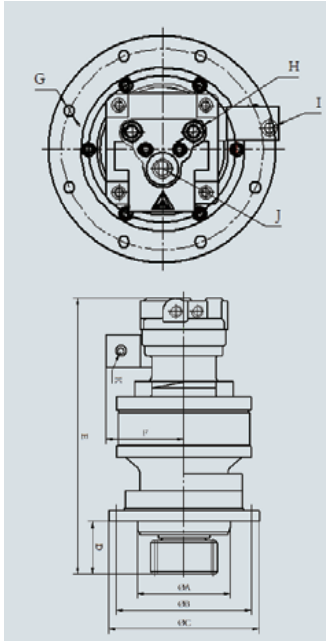

APPLICATIONS



微型系列行走马达
Micro Series Travel Motor



小型系列行走马达
Small Series Travel Motor



闭式系统行走马达
Closed System Travel Motor



中型系列行走马达
Medium Series Travel Motor



微型系列回转马达
Micro System Swing Motor



微型系列回转马达
Micro System Swing Motor



中小型系列回转马达
Small and Medium Swing Motor



中小型系列回转马达
Small and Medium Swing Motor

